



BUILDING MATERIALS

Approved for:

- Concrete C20/25 to C50/60, cracked and non-cracked

Also suitable for:

- Concrete C12/15

APPROVALS



ADVANTAGES

- The pre-portioned resin capsule FHB II-PF can be used in uncleaned drill holes. This makes it an economical and fast solution. In addition it is perfect for single and underwater applications.
- The special formulation used in the capsule FHB II-PF ensures particularly fast setting.


APPLICATIONS

Approved for:

- Guard rails
- Façades
- Staircases
- Steel brackets
- Masts
- Rash protection
- Steelwork constructions
- Timber constructions

FUNCTIONING

- The styrene-free vinyl ester mortar fully seals the drill hole.
- When using the resin capsule, set the anchor rod through rotating and hitting motions with a hammer drill. The RA-SDS setting tool, item no. 62420 is used.

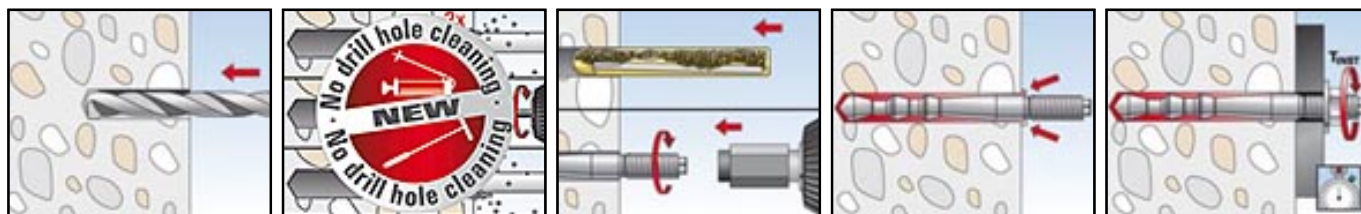

TECHNICAL DATA



Resin capsule FHB II-PF HIGH SPEED

Type	Art.-No.	ETA-approval	Drill hole diameter d_0	Drill hole depth h_0	Anchorage depth h_{ef}
			[mm]	[mm]	[mm]

FHB II-PF 8 x 60	500542	■	10	75	60
FHB II-PF 10 x 60	500547	■	10	75	60
FHB II-PF 10 x 75	507999	■	10	90	75
FHB II-PF 10 x 95	500543	■	12	110	95
FHB II-PF 12 x 75	500548	■	12	90	75
FHB II-PF 12 x 100	508000	■	14	115	100
FHB II-PF 12 x 120	500544	■	14	135	120
FHB II-PF 16 x 95	500549	■	16	110	95
FHB II-PF 16 x 125	508001	■	18	145	125
FHB II-PF 16 x 145	508002	■	18	165	145
FHB II-PF 16 x 160	500545	■	18	175	160
FHB II-PF 20 x 170	508003	■	25	190	170
FHB II-PF 20 x 210	500546	■	25	235	210
FHB II-PF 24 x 170	500550	■	25	190	170
FHB II-PF 24 x 210	508004	■	25	235	210